

Technical sheet :

AERIAL JIB 2



Benefits


- Maximum safety in people.
- Positive work area (+ 9.3 m).
- Negative work area (- 6.4 m).
- Forward reach work area (+ 6.81 m).

Technical characteristics

- 344° total boom rotation of the attachment.
- Basket width: 1200 mm x depth 800 mm.
- Legally approved for 2 persons.
- Wide stand for maximum stability during positive/negative position switch.
- Telescopic boom (2300 mm).

Capacities		Aerial Jib 2
Capacity including people (kg)		200
Number of people		2
Weight and dimensions		
Overall height (mm)	h17	2823
Width (mm)		1200
Length (mm)		4492
Depth (mm)	p5	800
Overall weight (kg)		1200
Working Parameters		
Machine Equipment		Platform predisposition, Return piping to hydraulic oil tank
Rotation 1		344
Hydraulic system		false

Machines compatibility		Aerial Jib 2
Reference number E-RECO		921293
MRT 1640 Easy T4 S2 360°		X
MRT 1840 Easy T4 S2 360°		X
MRT 1840 Easy T4 S2 400°		X
MRT 2145 Easy T4 S2 360°		X
MRT 2145 Easy T4 S2 400°		X
MRT 2150 Privilege Plus		X
MRT 2545 Easy T4 S2 360°		X
MRT 2545 Easy T4 S2 400°		X
MRT 2550 Privilege Plus		X
MRT 3255 Privilege Plus		X
MRT-X 1440 Easy 400°		X
MRT-X 1640 Easy 360°		X
MRT-X 1640 Easy 400°		X
MRT-X 1840 Easy 360°		X
MRT-X 1840 Easy 400°		X
MRT-X 2150 Privilege Plus		X
MRT-X 2545 Easy 360°		X
MRT-X 2545 Easy 400°		X
MRT-X 2550 Privilege Plus		X
MRT-X 3255 Privilege Plus		X
Reference number E-RECO 2		53027154
MRT 2470 Privilege Plus		X
MRT 3050 Privilege Plus		X
MRT-X 2470 Privilege Plus		X
MRT-X 3050 Privilege Plus		X

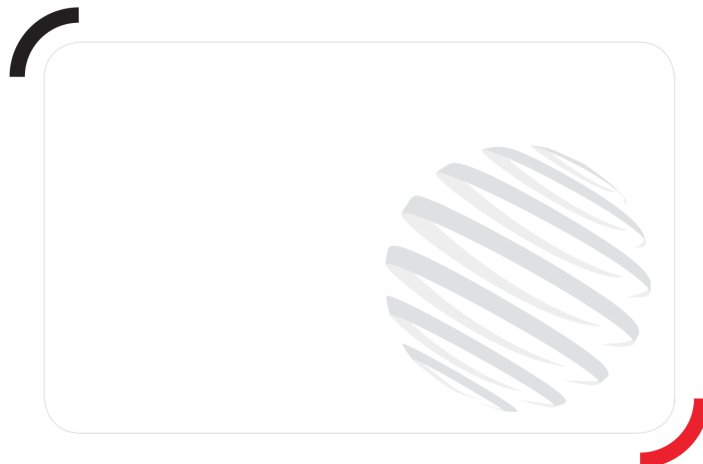

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes