

Technical sheet :

SNOW BLADE (COMPACT MACHINES)



Benefits

- Efficient snow removal in one go.

Technical characteristics


- 30° hydraulic orientation, 2 cylinders.
- Strong construction with shock absorber & horizontal self leveling.

Weight and dimensions		snow_blade_ref_bls_1500	snow_blade_ref_bls_1500_900_a	snow_blade_ref_bls_1500_900_b	snow_blade_ref_bls_1650_900	snow_blade_ref_bls_1800	snow_blade_ref_bls_1800_900	snow_blade_ref_bls_2100_900_a	snow_blade_ref_bls_2100_900_b	snow_blade_ref_bls_2400_900_a	snow_blade_ref_bls_2400_900_b
Overall height (mm)	h17	700	700	700	700	700	700	700	700	800	800
Width (mm)		1500	1500	1500	1650	1800	1800	2100	2100	2400	2400
Depth (mm)	p5	900	900	900	900	900	900	900	900	900	900
Overall weight (kg)		220	220	220	250	280	280	350	350	410	410
Working Parameters											
Working width - angled (mm)		1300	-	-	-	1558	-	-	-	-	-
Hydraulic system		false	false	false	false	false	false	false	false	false	false
Other Data for Attachments											
Hydraulic requirement standard (l/min)		180	-	-	-	180	-	-	-	-	-

Machines compatibility	snow_blade_ref_bls_1500	snow_blade_ref_bls_1500_900_a	snow_blade_ref_bls_1500_900_b	snow_blade_ref_bls_1650_900	snow_blade_ref_bls_1800	snow_blade_ref_bls_1800_900	snow_blade_ref_bls_2100_900_a	snow_blade_ref_bls_2100_900_b	snow_blade_ref_bls_2400_900_a	snow_blade_ref_bls_2400_900_b
Snow removing solutions references	BLS 1500	BLS 1500 / 900 (a)	BLS 1500 / 900 (b)	BLS 1650 / 900	BLS 1800	BLS 1800 / 900	BLS 2100 / 900 (a)	BLS 2100 / 900 (b)	BLS 2400 / 900 (a)	BLS 2400 / 900 (b)
All-Tach® Narrow	N51502219	-	-	-	-	-	-	-	-	-
All-Tach®	-	N51502219	N51502220	N51502221	N51502224	N51502224	N51502225	N51502026	N51502227	N51502027
4 point Carriage	N51502217	-	-	-	N51502222	-	-	-	-	-
Euro Carriage	N51502218	-	-	-	N51502223	-	-	-	-	-
850 R	-	X	-	-	-	-	-	-	-	-
1050 R	-	-	X	X	-	-	-	-	-	-
1350 R NXT2	-	-	-	-	-	X	-	-	-	-
1500 R NXT2	-	-	-	-	-	-	X	-	-	-
1650 R	-	-	-	-	-	-	X	-	-	-
1750 RT NXT:3	-	-	-	-	-	-	-	X	-	-
1900 R	-	-	-	-	-	-	X	-	-	-
2100 RT NXT:3	-	-	-	-	-	-	-	-	-	X
2200 R	-	-	-	-	-	-	X	-	-	-
2600 R	-	-	-	-	-	-	-	-	X	-
2700 V NXT:2	-	-	-	-	-	-	X	-	-	-
3300 V NXT:2	-	-	-	-	-	-	-	-	X	-
4200 V	-	-	-	-	-	-	-	-	-	-
MLA 1-25 H	X	-	-	-	-	-	-	-	-	-
MLA 3-35 H	X	-	-	-	-	-	-	-	-	-
MLA 4-50 H	-	-	-	-	X	-	-	-	-	-
MLA 5-50 H-Z	-	-	-	-	X	-	-	-	-	-

Weight and dimensions		snow_blade_ref_bls_2700_900
Overall height (mm)	h17	800
Width (mm)		2700
Depth (mm)	p5	900
Overall weight (kg)		450
Working Parameters		
Working width - angled (mm)		-
Hydraulic system		false
Other Data for Attachments		
Hydraulic requirement standard (l/min)		-

Machines compatibility	snow_blade_ref_bls_2700_900
Snow removing solutions references	BLS 2700 / 900
All-Tach® Narrow	-
All-Tach®	N51502320
4 point Carriage	-
Euro Carriage	-
850 R	-
1050 R	-
1350 R NXT2	-
1500 R NXT2	-
1650 R	-
1750 RT NXT:3	-
1900 R	-
2100 RT NXT:3	-
2200 R	-
2600 R	-
2700 V NXT:2	-
3300 V NXT:2	-
4200 V	X
MLA 1-25 H	-
MLA 3-35 H	-
MLA 4-50 H	-
MLA 5-50 H-Z	-

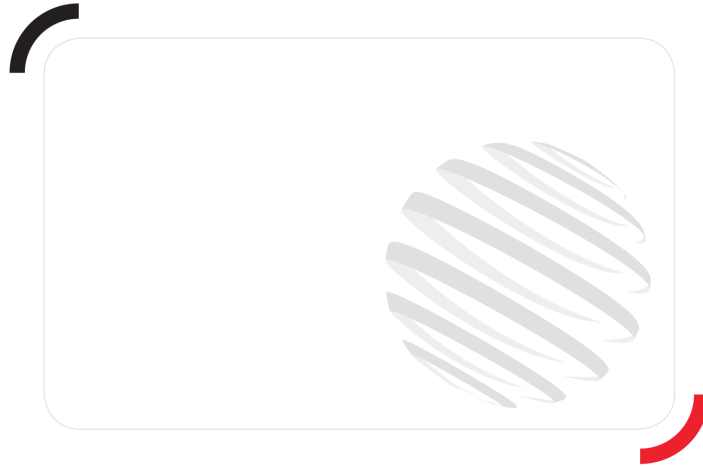

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes