

Technical sheet :


ME 318



	Technical characteristics		Metric
1.1	Manufacturer		Manitou
1.2	Model Name		ME 318
1.3	Power source		Electric
1.4	Operator type		Seated
1.5	Max. capacity	Q	1800 kg
1.6	Load centre of gravity	c	500 mm
1.8	Load distance, centre of drive axle to fork	x	355 mm
1.9	Wheelbase	y	1358 mm
	Weight		
2.1	Service Weight		3240 kg
2.2	Weight on front axle (laden) / rear axle (laden)		4350 kg / 690 kg
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1440 kg / 1800 kg
	Wheels		
3.1	Tyres type		PPS
3.2	Dimensions of front wheels		18x7-8
3.3	Dimensions of rear wheels		15x4,5-8
3.5	Number of front wheels / rear wheels		2 / 1
3.2	Number of drive wheels		2
3.6	Front wheel gauge	b10	910 mm
3.7	Rear wheel gauge	b11	175 mm
	Dimensions		
4.1	Tilt of Mast Forward (deg) / Backward (deg)	α / β	5.5 / 6.5
4.7	Height of overhead guard (cabin)	h6	2.042 mm
4.8	Seat height/stand height	h7	1000 mm
4.12	Height of towing bar (coupling height)	h10	500 mm
4.19	Overall length	l1	2968 mm
4.20	Length to face of forks	l2	1898 mm
4.21	Overall width	b1	1086 mm
4.22	Forks section / width / length	s / e / l	35 mm x 100 mm / 1070 mm
4.23	Fork carriage ISO 2328 (class/form) A/B		FEM 2A
4.24	Fork carriage width	b3	1000 mm
4.31	Ground clearance below mast	m1	100 mm
4.32	Ground clearance at centre of wheelbase	m2	110 mm
4.33	Aisle width for 1000 x 1200 pallet widthways	Ast	3241 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	3365 mm
4.35	Turning radius	Wa	1555 mm
	Performances		
5.1	Travel speed (laden / unladen)		16 km/h / 16 km/h
5.2	Lifting speed (laden / unladen)		0.4 m/s / 0.45 m/s
5.3	Lowering speed (laden / unladen)		0.46 m/s / 0.42 m/s
5.5	Drawbar pull (Laden / Unladen)		800 daN / 830 daN
5.7	Gradeability - laden / unladen		15 % / 17 %
5.9	Service brake		Oil bath
	Engine		
	Number of drive motor		2
6.2	Lift motor rating at S3 15%		8.6 kW
6.3	Battery according to DIN 43531/35/36 A, B, C		DIN43531 A
6.4	Battery / Batteries capacity		48 V / 575 Ah
6.6	Energy consumption		4.3 kW/h
	Miscellaneous		
8.1	Type of drive control		Electronic
8.2	Working hydraulic pressure for attachments		180 Bar
8.3	Oil flow rate for attachments		35 l/min
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 70 dB(A)

Free Lift Triplex		FLT 40	FLT 43	FLT 45	FLT 48	FLT 50	FLT 55	FLT 60	FLT 65
h2 - Free lift	mm	1325	1425	1490	1590	1655	1825	2010	2010
h1 - Height mast lowered *	mm	1910	2010	2075	2175	2240	2410	2625	2840
h3 - Lifting Height	mm	4000	4300	4500	4800	5000	5500	6000	6500
h4 - Height mast extended *	mm	4595	4895	5095	5395	5595	6095	6625	7170
α / β - Mast inclination (front / rear)	°	4 / 5	4 / 5	4 / 5	4 / 5	4 / 5	4 / 5	4 / 5	4 / 5
Residual capacity without attachment (Industrial load chart)	kg	1700	1650	1600	1600	1500	1300	1200	1000

Free Lift Triplex		FLT 40	FLT 43	FLT 45	FLT 48	FLT 50	FLT 55	FLT 60	FLT 65
Residual capacity with integrated side shift (Industrial load chart)	kg	1650	1600	1600	1600	1500	1300	1200	1000
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1550	1500	1500	1500	1400	1200	1100	900
Height at max capacity	mm	4000							
Height at max capacity with integrated sideshift	mm	4000							

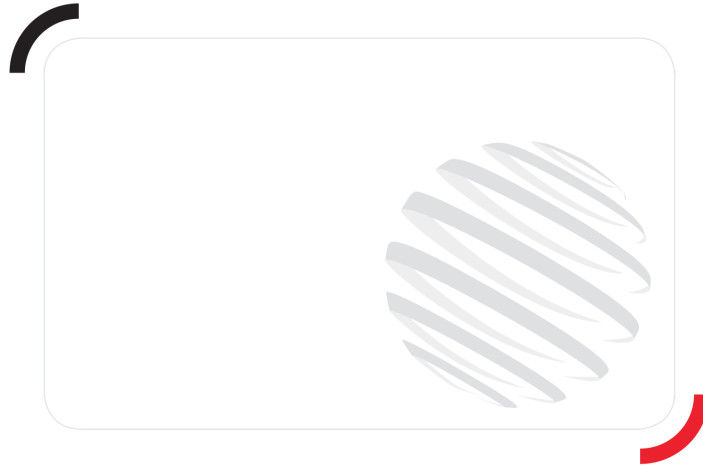

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508
RCS Nantes